

R580 Transparent



Features

- Diameter 580mm
- Modern, stylish and Innovative design
- Uniform light output
- Up/Down Lighting Optional
- Transparent Optional
- White/Black/Silver finishing available
- Durable with life span over 50,000 hours
- 5 Years Guarantee
- Simple and convenient installation

Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- Schools and Hospitals
- Hallway & lobbies
- Meeting Rooms



REV 1.1

08/26/2016

Sheenly LED Round Panel Light



Sheenly LED Round Panel Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with everlasting color. It is powered by low voltage constant current driver, which is safety, energy saving and long life.

Sheenly LED Panel light is the ideal replacement for traditional grid lights and fluorescent tubes. Moreover, Sheenly Panel light creates extremely harmonies and uniform lights, which conventional light never achieved.

Specifications

| | |
|---------------------------------|-------------------------|
| Dimension | D580*15 mm |
| Power & Lumen Output | |
| 40W | 3400 lm @ 4000K |
| 60W | 5000 lm @ 4000K |
| Color Temperature | |
| Warm White | 3000 ±200K |
| Natural White | 4000 ±250K |
| Pure White | 5700 ±350K |
| Color Rendering Index | >80 |
| Rated Life (L70) | 50,000 Hours |
| Housing | Aluminum |
| Optics | Opal |
| Beam Spread | 120° |
| Operating Temperature | -20°C to +45°C (Amb.) |
| Input Voltage | 200-240V/AC |
| Power Factor | >0.95 |
| Working Voltage | |
| 40W | 25 V/DC |
| 60W | 38 V/DC |
| Working Current | |
| | 40W@1050mA |
| | 60W@1400mA |
| Net Weight | 3.15 Kg |
| Glow Wire | 650 °C (850°C Optional) |
| IP | IP40 |
| IK | IK05 |
| Installation | Suspension |

Dimension and Illumination Diagram

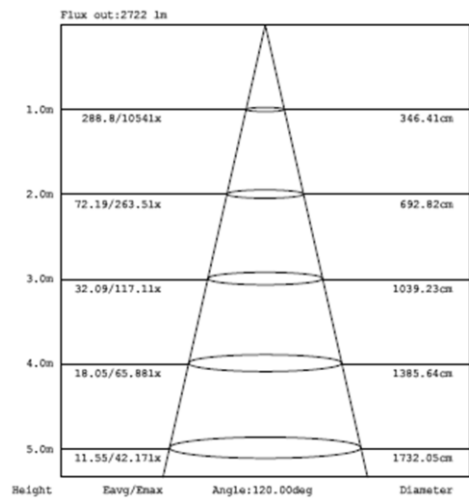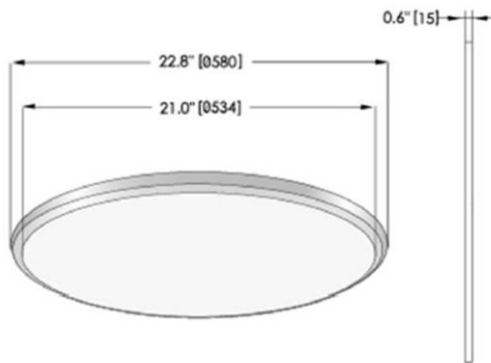

Ordering Information

| Sheenly | Class | Watt | CCT | Model | Finishing | Options |
|---------------------|-----------|------------|-------------------------------------------------|-------|----------------------|---------------------------------------|
| SL=Sheenly Lighting | PAN=Panel | 40W 60W | WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K | R60 | BK=Black WH=White | UD=Up/down Lighting TP=Transparent |

*Standard finishing comes in White, for other finishing color please specify when place the order.

| Part Number | Power | CCT | Lumen Output | Beam | Dimension |
|-------------------------|-------|-------------------|--------------|------|------------|
| SL-PAN-40W-WW-R60-UD-TP | 40W | 3000K/4000K/5700K | 3400 | 120° | D580*15 mm |
| SL-PAN-40W-NW-R60-UD-TP | | | 3400 | 120° | D580*15 mm |
| SL-PAN-40W-PW-R60-UD-TP | | | 3400 | 120° | D580*15 mm |
| SL-PAN-60W-WW-R60-UD-TP | 60W | 3000K/4000K/5700K | 5000 | 120° | D580*15 mm |
| SL-PAN-60W-NW-R60-UD-TP | | | 5000 | 120° | D580*15 mm |
| SL-PAN-60W-PW-R60-UD-TP | | | 5000 | 120° | D580*15 mm |

Accessory



Suspension Kit:
Round Driver Box, Steel Cables, Screws, etc.



*All specifications subject to change without notice.

©2009-2016 Sheenly Lighting all rights reserved.

LED Round Panel Light R580 - Suspension

SHEENLY

